


# Control Wire

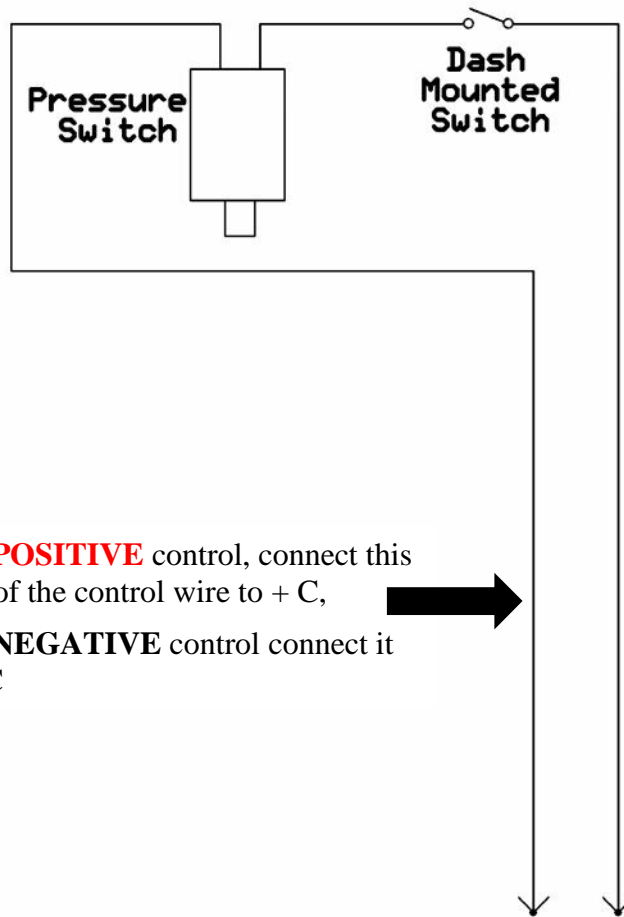

For **POSITIVE** control, connect this end of the control wire to + C,  
For **NEGATIVE** control connect it to -C

For **POSITIVE** control, connect this end of the control wire to a positive battery source (12 or 24 volts), such as V+ on the control module, or a dash mounted switch.

For **NEGATIVE** control, connect it to any convenient ground location on the vehicle, or to GND on the control module.

+12v or 24v  
Battery positive

Main Power Cable  
(#4 AWG Red)

Main Ground Cable  
(#4 AWG Black)

Battery Ground

OFF Switch ON +C = = V+  
-C = = GND

**Motor Control Module**  
(Located on compressor motor)